


TECHNICAL DATA SHEET

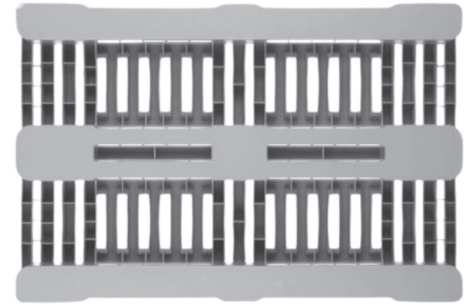

| DIMENSION | STATIC LOAD | DYNAMIC LOAD | RACK LOAD | REINFORCEMENT | RIM OPTIONS | ANTISLIP OPTION |
|--------------|-------------|--------------|-----------|---------------|--------------------|-----------------|
| 800x1200x160 | 4800 kg | 1200 kg | 850 kg | none | no rim 6 mm rim | NO |

| PRODUCT CODE | QUALITY | RM | COLOR | WEIGHT | RUNNER / FEET |
|--------------------|---------|-----------------|------------|---------|-----------------|
| DPP 1208 H1 Q1 | Q1 | HDPE | Light Gray | 18 kg | 3 Runner welded |
| DPP 1208 H1 Eco Q1 | Q1 | HDPE | Light Gray | 18 kg | 3 Runner |
| DPP 1208 H1 Q2 | Q2 | r - HDPE + HDPE | Black | 18,5 kg | 3 Runner welded |
| DPP 1208 H1 Eco Q2 | Q2 | r - HDPE + HDPE | Black | 18,5 kg | 3 Runner |

| TRANSPORT | Truck (2,95) | 20 ft | 40 ft HQ | 40 ft PW HQ | 45 ft PW HQ |
|-----------|--------------|-------|----------|-------------|-------------|
| | 588 | 230 | 462 | 504 | 546 |